



GU24 Outdoor Wall Pack Specifications

GU24 Lamps – GU24 Base, NPF Compact Fluorescent, 10,000 Hours Lamp life

Item Number	Wattage	Incandescent Wattage Comparison	Description	Initial Lumens	Input Line Current	Height (Inches)	Width (Inches)	Replacement Lamp																																			
57013BPCGU	13	60	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	900	.22A	10	7.4	33113SP																																			
57013WPCGU	13	60	Outdoor Wal Pack White, Prismatic diffuser, Photocell	900	.22A	10	7.4	33113SP																																			
57018BPCGU	18	75	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	1200	.30A	10	7.4	33118SP																																			
57018WPCGU	18	75	Outdoor Wal Pack White, Prismatic diffuser, Photocell	1200	.30A	10	7.4	33118SP																																			
57023BPCGU	23	90	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	1600	.38A	10	7.4	33123SP																																			
57023WPCGU	23	90	Outdoor Wal Pack White, Prismatic diffuser, Photocell	1600	.38A	10	7.4	33123SP																																			
57027BPCGU	27	100	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	1800	.45A	10	7.4	33127SP																																			
57027WPCGU	27	100	Outdoor Wal Pack White, Prismatic diffuser, Photocell	1800	.45A	10	7.4 </tr <tr> <td>57032BPCGU</td> <td>32</td> <td>120</td> <td>Outdoor Wal Pack Black, Prismatic diffuser, Photocell</td> <td>2000</td> <td>.53A</td> <td>10</td> <td>7.4</td> <td>33132SP</td> </tr> <tr> <td>57032WPCGU</td> <td>32</td> <td>120</td> <td>Outdoor Wal Pack White, Prismatic diffuser, Photocell</td> <td>2000</td> <td>.53A</td> <td>10</td> <td>7.4</td> <td>33132SP</td> </tr> <tr> <td>57042BPCGU</td> <td>42</td> <td>150</td> <td>Outdoor Wal Pack Black, Prismatic diffuser, Photocell</td> <td>2500</td> <td>.70A</td> <td>10</td> <td>7.4</td> <td>33142SP</td> </tr> <tr> <td>57042WPCGU</td> <td>42</td> <td>150</td> <td>Outdoor Wal Pack White, Prismatic diffuser, Photocell</td> <td>2500</td> <td>.70A</td> <td>10</td> <td>7.4</td> <td>33142SP</td> </tr>	57032BPCGU	32	120	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	2000	.53A	10	7.4	33132SP	57032WPCGU	32	120	Outdoor Wal Pack White, Prismatic diffuser, Photocell	2000	.53A	10	7.4	33132SP	57042BPCGU	42	150	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	2500	.70A	10	7.4	33142SP	57042WPCGU	42	150	Outdoor Wal Pack White, Prismatic diffuser, Photocell	2500	.70A	10	7.4	33142SP
57032BPCGU	32	120	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	2000	.53A	10	7.4	33132SP																																			
57032WPCGU	32	120	Outdoor Wal Pack White, Prismatic diffuser, Photocell	2000	.53A	10	7.4	33132SP																																			
57042BPCGU	42	150	Outdoor Wal Pack Black, Prismatic diffuser, Photocell	2500	.70A	10	7.4	33142SP																																			
57042WPCGU	42	150	Outdoor Wal Pack White, Prismatic diffuser, Photocell	2500	.70A	10	7.4	33142SP																																			

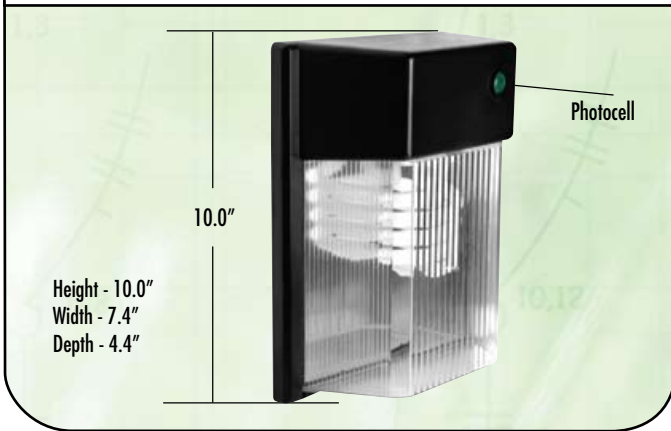

GU24 Lamp



★ = Energy Star

Specifications (at full brightness)

End of Life Protection.....	Yes
Ballast Type	Electronic
Starting Method	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	50/60HZ
Lamp Life (rated)	10,000 Hours
Color Temperature	2700°K
Color Rendering Index	84
Minimum Starting Temperature	-20 ° F
Maximum Operating Temperature.....	160 ° F
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	45 KHZ
Lamp Current Crest Factor.....	< 1.60
Maximum Open Circuit Voltage	600V
Power Factor	>.50
Total Harmonic Distortion	< 150%
Dimming Range	N/A

Applications

- Use outdoors, mounts flush to a wall
- Perfect for: Porches, Door ways, Garages

Features and Benefits

- UL approved for wet locations
- Long life, 10,000 hour average rated lamp life
- Lasts 7 years, based on 3 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002
CERTIFIED

2 YEAR FIXTURE
WARRANTY

1 YEAR LAMP
WARRANTY