



## GU24 Outdoor Floodlight Specifications

GU24 Lamps – GU24 Base, NPF Compact Fluorescent, 10,000 Hours Lamp life

Item Number	Wattage	Incandescent Wattage Comparison	Description	Initial Lumens	Input Line Current	Height (Inches)	Width (Inches)	Replacement Lamp
56513BRPCGU	13	60	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	900	.22A	6.6	9.5	33113SP
56518BRPCGU	18	75	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	1200	.30A	6.6	9.5	33118SP
56523BRPCGU	23	90	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	1600	.38A	6.6	9.5	33123SP
56527BRPCGU	27	100	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	1800	.45A	6.6	9.5	33127SP
56532BRPCGU	32	120	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	2000	.53A	6.6	9.5	33132SP
56542BRPCGU	42	150	Outdoor Floodlight, Brown 1/2" NTP Mount, Photocell	2500	.70A	6.6	9.5	33142SP

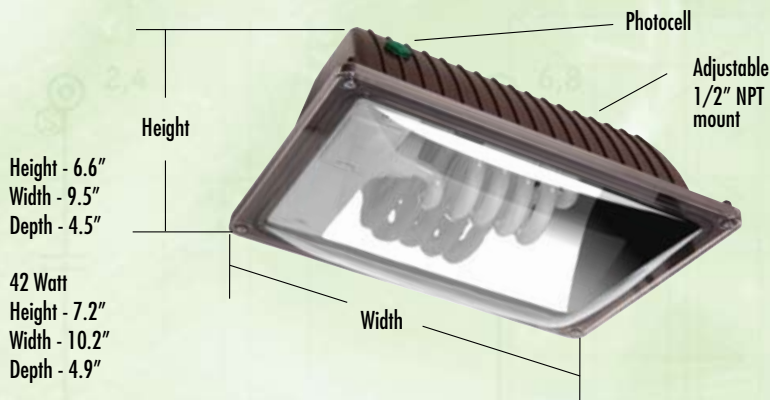

GU24 Lamp



### Specifications ( at full brightness )

End of Life Protection.....	Yes
Ballast Type .....	Electronic
Starting Method .....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	10,000 Hours
Ballast Life (rated) .....	50,000 Hours
Color Temperature .....	2700°K
Color Rendering Index .....	84
Minimum Starting Temperature .....	-20 ° F
Maximum Operating Temperature.....	160 ° F
U.L. / C.U.L. Listed .....	Yes
FCC Compliance .....	Part 18, Subpart C
Lamp Operating Frequency .....	45 KHZ
Lamp Current Crest Factor.....	< 1.60
Maximum Open Circuit Voltage .....	600V
Power Factor .....	>.50
Total Harmonic Distortion .....	< 150%
Dimming Range .....	N/A

### Applications

- Use outdoors, mounts flush to a wall
- Perfect for: Porches, Door ways, Garages

### Features and Benefits

- UL approved for wet locations
- Long life, 10,000 hour average rated lamp life  
50,000 hour average rated ballast life
- Lasts 7 years, based on 3 hours use per day
- Lasts 10-13 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance and labor costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002  
CERTIFIED

2 YEAR FIXTURE  
WARRANTY

1 YEAR LAMP  
WARRANTY