


## 148 Series Ceiling Fixture Specifications

40 Watt Advanced T6 Circline Lamps – NPF, 10,000 hours lamp life, 50,000 hours ballast life

Item Number	Description	Ballast Wattage	Lamp Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	Replacement Lamp
14840BS ★	13" Brushed Nickel, Melon Glass Dome	40	40	150	2800	.66A	32040

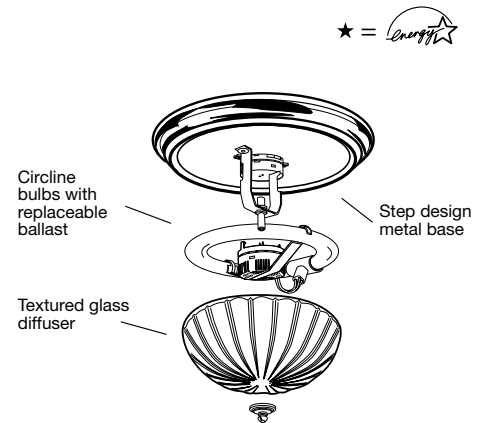

### Specifications ( at full brightness )

End of Life Protection.....	Yes
Ballast Type .....	Electronic
Starting Method .....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	10,000 Hours
Ballast Life (rated) .....	50,000 Hours
Color Temperature .....	2850°K
Color Rendering Index .....	84
Minimum Starting Temperature .....	-20 ° F
Maximum Operating Temperature.....	160 ° F
U.L. / C.U.L. Listed .....	Yes
FCC Compliance .....	Part 18, Subpart C
Lamp Operating Frequency.....	45 KHZ
Lamp Current Crest Factor .....	< 1.60
Maximum Open Circuit Voltage .....	600V
Power Factor .....	> .50
Total Harmonic Distortion .....	< 150%

### Applications

- Use anywhere a standard incandescent fixture is used
- Use in bedroom, hallways, kitchens, living rooms, and rec rooms

### Features and Benefits

- Long life, 10,000 hour average rated bulb life 50,000 hour average rated ballast life
- Bulb lasts 7 years, based on 4 hours use per day
- Bulb lasts 10 times longer than similar incandescent bulbs
- 2850°K color temperature closest to incandescent light
- Quick run-up time
- Instant start, flicker free
- Replaceable Ballast, Snap-in / No wiring
- World class phosphor insures high lumen output and excellent lumen maintenance
- UL Damp Location Rated

