



## GU24 Outdoor Globe Fixture Specifications

9W, 13W, 18W GU24 Lamps – GU24 Base, NPF Compact Fluorescent, 10,000 Hours Lamp life

Item Number	Description	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	Total Harmonic Distortion	Power Factor	Replacement Lamp
55809BPCGU	GU24 Wall Fixture, Black, Photocell, White Globe	9	40	600	.15A	<150%	>.50	33109SP
55809WPCGU	GU24 Wall Fixture, White, Photocell, White Globe	9	40	600	.15A	<150%	>.50	33109SP
55809BPCZGU	GU24 Wall Fixture, Black, Photocell, Prismatic Globe	9	40	600	.15A	<150%	>.50	33109SP
55809WPCZGU	GU24 Wall Fixture, White, Photocell, Prismatic Globe	9	40	600	.15A	<150%	>.50	33109SP
55813BPCGU ★	GU24 Wall Fixture, Black, Photocell, White Globe	13	60	900	.22A	<150%	>.50	33113SP
55813BPCZGU ★	GU24 Wall Fixture, Black, Photocell, Prismatic Globe	13	60	900	.22A	<150%	>.50	33113SP
55813WPCGU ★	GU24 Wall Fixture, White, Photocell, White Globe	13	60	900	.22A	<150%	>.50	33113SP
55813WPCZGU ★	GU24 Wall Fixture, White, Photocell, Prismatic Globe	13	60	900	.22A	<150%	>.50	33113SP
55818BPCGU ★	GU24 Wall Fixture, Black, Photocell, White Globe	18	75	1200	.30A	<150%	>.50	33118SP
55818BPCZGU ★	GU24 Wall Fixture, Black, Photocell, Prismatic Globe	18	75	1200	.30A	<150%	>.50	33118SP
55818WPCGU ★	GU24 Wall Fixture, White, Photocell, White Globe	18	75	1200	.30A	<150%	>.50	33118SP
55818WPCZGU ★	GU24 Wall Fixture, White, Photocell, Prismatic Globe	18	75	1200	.30A	<150%	>.50	33118SP

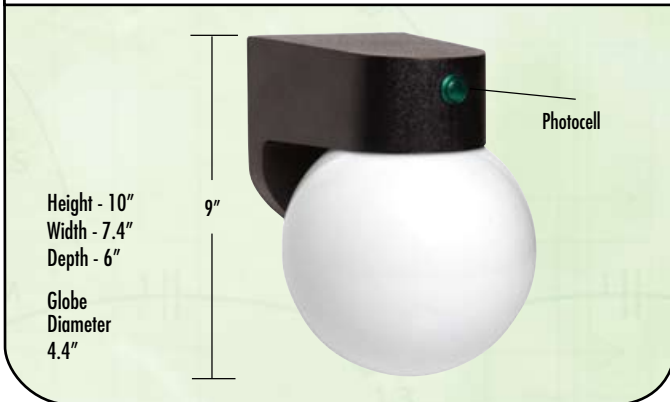

GU24 Lamp

★ = Energy Star



### Specifications ( at full brightness )

End of Life Protection.....	Yes
Ballast Type .....	Electronic
Starting Method .....	Modified Rapid Start
Input Line Voltage .....	120VAC
Input Line Frequency .....	50/60HZ
Lamp Life (rated) .....	10,000 Hours
Color Temperature .....	2700°K
Color Rendering Index .....	82
Minimum Starting Temperature .....	-20 ° F
Maximum Operating Temperature.....	160 ° F
U.L. / C.U.L. Listed .....	Yes
FCC Compliance .....	Part 18, Subpart C
Lamp Operating Frequency .....	45 KHZ
Lamp Current Crest Factor.....	< 1.60
Maximum Open Circuit Voltage .....	600V
Power Factor .....	>.50
Total Harmonic Distortion .....	< 150%
Dimming Range .....	N/A

### Applications

- Use outdoors, mounts flush to a wall
- Perfect for: Porches, Door ways, Garages

### Features and Benefits

- UL approved for wet locations
- Fixtures automatically include Photocell for dusk to dawn applications
- Long life, 10,000 hour average rated lamp life
- Lasts 7 years, based on 3 hours use per day
- Lasts 10 times longer than similar incandescent
- Quick run-up time
- Instant start, flicker free
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002  
CERTIFIED

2 YEAR FIXTURE  
WARRANTY

1 YEAR LAMP  
WARRANTY