


Designer Collection – Pendant Fixture

GU24 SpringLamps® (lamp included) GU24 Base, NPF Compact Fluorescent, 10,000 Hours Lamp life

Item Number	Description	Lamp Qty	Lamp Wattage	Incandescent Wattage Comparison	System Initial Lumens	Lamp Life (Hours)	Input Line Current	Total Harmonic Distortion	Power Factor	Lense Cover	Over-all Finish	Replacement Lamp
DES2X18GUPENDBS	36w Ceiling Pendant Fixture	2	18	75	2400	10000	.60A	< 150%	> .50	Alabaster	Brushed Nickel	33118SP
DES2X18GUPENDWH	36w Ceiling Pendant Fixture	2	18	75	2400	10000	.60A	< 150%	> .50	Alabaster	White	33118SP

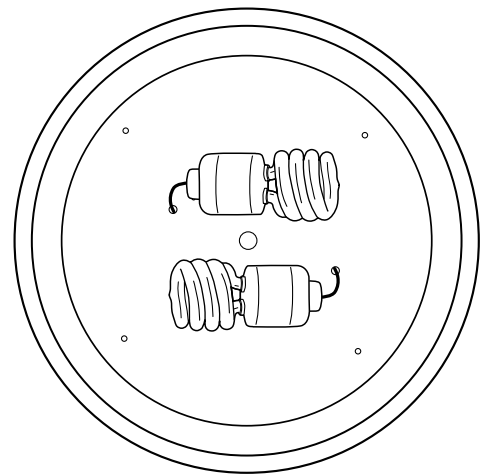

Available with two 18W GU Lamps.

Specifications (at full brightness)

End of Life Protection.....	Yes
Ballast Type	Electronic
Starting Method	Modified Rapid Start
Input Line Voltage	120VAC
Input Line Frequency	50/60HZ
Lamp Life (rated)	10,000 Hours
Color Temperature	2700°K
Color Rendering Index	82
Minimum Starting Temperature	0° F
Maximum Operating Temperature.....	160° F
U.L. / C.U.L. Listed	Yes
FCC Compliance	Part 18, Subpart C
Lamp Operating Frequency	53 KHZ
Lamp Current Crest Factor.....	< 1.60
Maximum Open Circuit Voltage	600V

Applications

- Use anywhere a standard incandescent fixture is used
- Use in bedroom, hallways, kitchens, living rooms, and rec rooms

Features and Benefits

- Long life, 10,000 hour average rated bulb life
- Bulb lasts 7 years, based on 3 hours per day
- Bulb lasts 10 times longer than similar incandescent bulbs
- Quick run-up time
- Instant start, flicker free
- World class phosphor insures high lumen output and excellent lumen maintenance



ISO 9002
CERTIFIED

2 YEAR
WARRANTY